

## Order Form for Complete Elevator

Sender		Please send us your best QUOTATION for material as specified in the following.				
			the materials as specified i	in the following, at our usual co	Date	
Installation Address			Delivery Address			
Valid Code: EN 81.1 EN 81.2	Lif		ıbblic	assenger Ca assenger+goods ed Lift	r Lift	
General Features         Capacity       kg         Passenger       Stops No.         Services No	In Line Opposite Adjacen	He es Sp	avel ci	m Frequency	V Hz	
Only for electrical		Machine Above Machine Above w on side	1 speed 2 speed ACVV VVVF	90 operation 120 operation 180 operatio 240 operatio	ns/hour ns/hour	
Only for hydraulical	Indirect 2:1 - Indirect 2:1 - Central direct Lateral direct	2 Piston	Lateral direct 1:1 - 2	Pistons 60 operation 90 operation Machine Roo Machine Roo	ns/hour om Above	
Guide Clamping Landing door Clamping	Spitted		To wall	Welded Welded		
Microproc.Control Board	Universal Simplex		Down Collective	Emergeny W	/ITHOUT reopening /ITH reopening for Hydraulic	
			Page 1/5			

BORAL No despine unwatter							
Car       Width       mm       Model       SAFELIFT       Good Lift         Depth       mm       NORMANNA       Bed Lift         Height       mm       SVEVA       Special (see remarks)							
Inside walls finishings         Steel Plastified       Color         Laminated Plastic       Color         Stainless Steel       Type							
Finishings (Corner, skirting, Entrance Wall)       Steel Plastified       Color       (Plalam)         Stainless Steel       Type							
Main Entrance       No. Panels       C.O.       mm       X       mm       Open Direction:       Central       Left Dir.       Right Dir.         Second Entrance       No. Panels       C.O.       mm       X       mm       Open Direction:       Central       Left Dir.       Right Dir.							
Lighting: Alpha Type Sideral Type Roof type							
Car Push Botton       Alluminium Plate       St. Steel Plate       St. Steel Column							
Floors:							
Mirror:       With       Antischok band:       With       Floor:       Linoleum         Without       Without       Bubble Rubber         Half Wall       Wood       Coverded with tick       mm         Full Wall       Rubber							
Remarks:							
Page 2/5							

BORAL
No-stopping innovation

## Order Form for Complete Elevator


Landing Door							
Frames Finishings: W St St Sr	ithout Panels Finishings: Steel Plastified Color   eel Plastified Color Stainless Steel Type   ainless Steel Type Smooth Paint RAL   mooth Paint RAL Antirust RAL   ntirust RAL next dir arrows   St. Steel Plate alarm led position display at floors						
Hydraulical Power Unit       Direct starting       Hand Pump         Star/Delta starting       Oil Heating Resistance         Electronic Soft Starter       Horizontal distance from the shaftcm							
Shaft Survey	mm     mm     mm       mm     mm     mm						
	Page 3/5						



## Order Form for Complete Elevator

## Plumb Survey

Please, fill in the table below, with the distance for each floor to the two plumb-line. с С ЪЧ Plumb line AS Dp S D РЧ Α Floor Pd Dp S D As Ps Ad f-f height All the measure must be in mm.

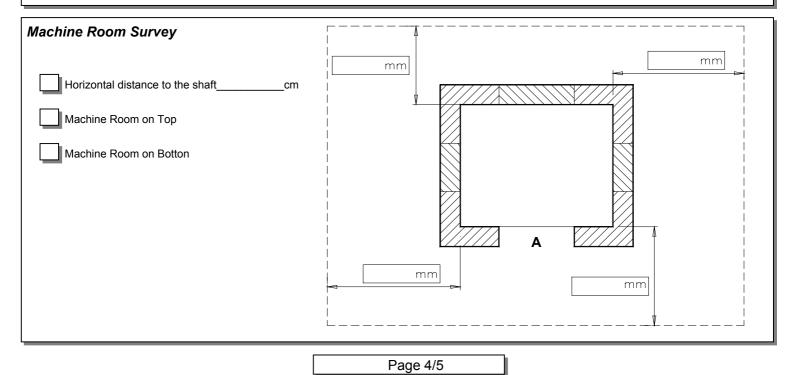

BORAL         Order Form for Complete Elevator					
Delivery Terms: Package:	S: Requested Week Confirmed Week				
Render: Transport:	Ex Works	F.O.B.	C. and F.		
Image: constraint of the second se					
		Page 5			